



# DLITE

Control Solutions for Creative Professionals



DLITE

DLITE




Dlite offers intuitive, hands-on tools for quick programming and playback, as well as all the advanced features required for complex lighting applications.

Dlite supports both manual and programmed operation. Up to 96 faders provide direct manual access to channels, 2 scene preset operation, and context sensitive programming of fixture parameters, libraries, groups, cues, scenes, and chases. 20 playback controllers and one split cross-fader offer manual and fully automated playback operations.


Dlite is perfect for medium size venues with limited budgets, but complex requirements and diverse needs. Theaters, television studios, rental houses and schools will find Dlite the most affordable, high-performance and intuitive console available.

Dlite includes a broad range of compatible models, offering convenient and cost effective solutions for any venue and budget.

DLITE 96

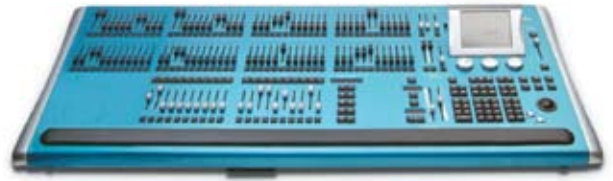

DLITE 72

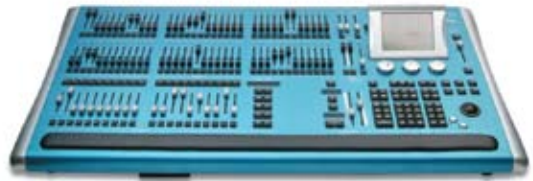

DLITE 48



DLITE COMPACT



DLITE PC



# HIGHLIGHTS

# HIGHLIGHTS



- Adjustable graphic (320x240) LCD touch-screen
- SVGA monitor display
- 4 control universes, 2048 attributes
- Internal flash disk for storage of shows and fixture profiles
- Internal battery for safe emergency shutdown
- Ethernet for DMX distribution and remote control
- I/F/C/B timing
- Effects ('Shapes') generation package
- Automatic color palettes
- 16 bit fixture parameters
- Wireless PDA remote control
- PC-Based fixture profile editor



**CAPACITY**

4 control universes/2048 attributes (2 via DMX ports,  
2 via Ethernet)  
512 control channels  
252 moving lights (up to 48 parameters per fixture)  
72 Q-lists ('Stacks') of up to 999.9 Cues  
240 Scenes  
72 Chases of up to 48 steps  
72 Snaps (playback snapshots or 'Pages')  
96 Groups (fixture selection macros)  
72 Effects  
120 Show files on internal flash disk  
120 Device (fixture profile) files on internal flash disk

**INPUT/OUTPUT**

2 DMX512 output ports  
1 DMX512 input port  
1 Ethernet port (for additional DMX distribution and  
remote control)  
SMPTE input  
MIDI In/Thru  
Audio (Sound To Light) input

**DISPLAY**

1 graphic 320x240 LCD touch Screen  
1 external SVGA monitor display

**STORAGE**

Internal 16MB Flash Disk  
3.5" Floppy Disk

**DIMENSIONS**

	Length	Width	Height	Weight
<b>COMPACT</b>	67cm (26")	47cm (18.5")	9cm (3.5")	9kg/17.6(lbs)
<b>48</b>	97cm (38")	57cm (22.5")	9cm (3.5")	12kg/24.6(lbs)
<b>72</b>	105cm (41")	57cm (22.5")	9cm (3.5")	14kg/30.9(lbs)
<b>96</b>	123cm (48.5")	57cm (22.59)	9cm (3.5")	16kg/35.3(lbs)

Compulite Systems (2000) Ltd.  
9 Hanagar Street, Neve Ne'eman B  
Industrial Zone  
Hod Hasharon, 45421, Israel  
Tel: 972 9 744 6555  
Fax: 972 9 746 6515  
info@compulite.com  
www.compulite.com

